

Access controlled... Future secured.

PORTFOLIO

PEDESTRIAN PRODUCTS

AS **AUTOMATIC**
SYSTEMS
LEER GROUP

PEDESTRIAN



SECURITY ENTRANCE LANES

SmartLane Series

The elegant and discreet design of the SmartLane range of high security bidirectional and speed (opening time < 1 sec.) gates blends seamlessly into any type of architecture.

SmartLane 900

STANDARD LANE WITH COMPACT FOOTPRINT

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



SmartLane 910

WIDE LANE WITH COMPACT FOOTPRINT

- Passage width: from 800 to 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm



SmartLane 901

STANDARD LANE WITH ENHANCED ENTRANCE CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



SmartLane 911-912

WIDE LANE WITH ENHANCED ENTRANCE OR ENTRANCE / EXIT CONTROL

- Passage width: from 800 to 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm



* picture SmartLane 912

SmartLane 902

STANDARD LANE WITH ENHANCED ENTRANCE / EXIT CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



SmartLane 910-911-912 Twin


DUAL LANE WITH COMPACT FOOTPRINT

- Passage width: 2 x 500 mm
- Obstacle heights: 1000/1200/1700/1900 mm




* picture SmartLane 910 Twin


CONFIGURATION EXAMPLES




SmartLane 900



SmartLane 901

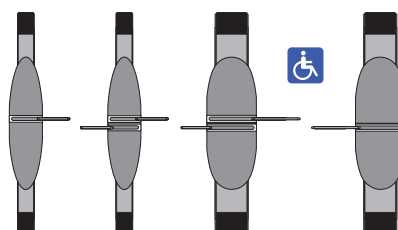

SmartLane 902 + SmartLane 912



SmartLane 910 Twin

SECURITY ENTRANCE LANES

PNG Series

The bidirectional and speed (opening time < 1 sec.) PNG range of products combines physical and electronic high security features. This series benefits from more than 10 years of performance and reliability. Their design is perfect for industrial and secured environments.

PNG 380

STANDARD LANE WITH COMPACT FOOTPRINT

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



PNG 390

WIDE LANE WITH COMPACT FOOTPRINT

- Passage width: from 800 to 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm



PNG 381

STANDARD LANE WITH ENHANCED ENTRANCE CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



PNG 391-392

WIDE LANE WITH ENHANCED ENTRANCE OR ENTRANCE / EXIT CONTROL

- Passage width: from 800 to 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm



* picture PNG 391

PNG 382

STANDARD LANE WITH ENHANCED ENTRANCE / EXIT CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm



PNG 390-391-392 Twin


DUAL LANE WITH COMPACT FOOTPRINT

- Passage width: 2 x 500 mm
- Obstacle heights: 1000/1200/1700/1900 mm




* picture PNG 390 Twin


CONFIGURATION EXAMPLES




PNG 380



PNG 381

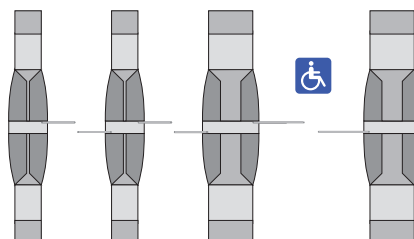

PNG 382 + PNG 392



PNG 390 Twin

SECURITY ENTRANCE LANES

SlimLane Series

Featuring a streamlined design, SlimLane's double swing door security entrance lanes combine high throughput (opening time < 1 sec.) with advanced user protection while providing a minimal footprint.

SlimLane 940

STANDARD LANE WITH COMPACT FOOTPRINT

- Passage width: 600 mm (from 550 to 725 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint: 1000 x 1640 mm



SlimLane 950

WIDE LANE WITH COMPACT FOOTPRINT

- Passage width: 900 mm (from 725 to 950 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint: 1300 x 1640 mm



* picture with trolley detection & side glasses

SlimLane 944

STANDARD LANE WITH VERY COMPACT FOOTPRINT

- Passage width: 550 mm (from 525 to 600 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint: 857 x 1640 mm



* picture with trolley detection


SlimLane 945 Twin

DUAL LANE WITH VERY COMPACT FOOTPRINT


- Passage width: 2 x 550 mm (from 2 x 525 to 2 x 600 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint: 1565 x 1640 mm




CONFIGURATION EXAMPLES




SlimLane 940



SlimLane 940 + SlimLane 950



SlimLane 945 Twin



SlimLane 944

SWING GATES

PPV Series

Bidirectional PPV swing gates can be used alone or in conjunction with other products such as SmartLane, PNG, SlimLane and TBV. They can be installed discretely and aesthetically in the entrance area of a building.

PPV 323

MATCHING TBV

- Passage width: 1000 mm
- Obstacle height: 930 mm



PMD Series

Bidirectional PMD swing gates provide a wider walkway for the evacuation of buildings in the event of an emergency, for people with reduced mobility and service personnel. They are used in conjunction with the SmartLane and PNG series.

SmartLane 935

MATCHING SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 1000/1700/1900 mm



SL 930

MATCHING SLIMLANE 94x / 95x AND SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 900/1000/1200 mm



PMD 335

MATCHING PNG 380 / 390

- Passage width: 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm



SL 931

MATCHING SLIMLANE 94x / 95x AND SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 1500/1700/1900 mm



PMD 336-337

MATCHING PNG 38x / 39x

- Passage width: 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm




* picture PMD 337


CONFIGURATION EXAMPLES




TBV 327 + PPV 323



SlimLane 940 + SL 930/931

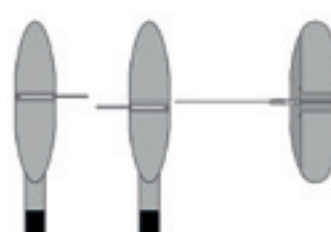

SmartLane 901 + SmartLane 935

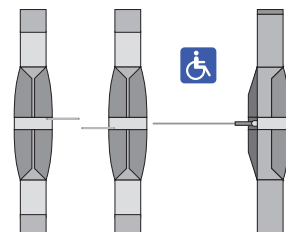

PNG 382 + PMD 337

SECURITY DOORS

ClearLock Series

The ClearLock series is a circular security booth with interlocking doors that offers stringent entrance control, particularly required for sensitive sites.

ClearLock 63x

CURVED SECURITY BOOTH

- Single Sliding Doors
- Passage widths: 580/700/900 mm
- External diameters: 1050/1150/1485 mm



* picture ClearLock 630 with metal detector

ClearLock 64x

SQUARE SECURITY BOOTH

- Single Sliding Doors
- Passage widths: 580/700/900 mm
- Footprint: 1050 x 1050/
1150 x 1150/1485 x 1485 mm



* picture ClearLock 640

ClearLock 65x

FAST SECURITY BOOTH

- Double Sliding Doors
- Passage widths: 580/890/900/1050 mm
- Available in round, semi-circular, elongated booths



* picture ClearLock 650

RevLock Series

The RevLock series is a contemporary, revolving security door for prestigious locations. Its frame design assures great thermal insulation, providing strong energy savings in comparison to sliding doors.

RevLock 600/610

3-SECTIONS REVOLVING DOOR

- Passage width: 800 mm
- External diameter: 1800 mm



* picture RevLock 600

RevLock 601/611

4-SECTIONS REVOLVING DOOR

- Passage width: 1045 mm
- External diameter: 2300 mm



* picture RevLock 601

InterLock Series

InterLock rectangular booths are equipped with fast sliding doors. They ensure a high level of access control and are particularly suited to public sites.

InterLock 67x


RECTANGULAR BOOTH

- Single or double passage
- Passage widths: 700 and/or 900 mm




* picture InterLock 670


CONFIGURATION EXAMPLES




ClearLock 63x




ClearLock 64x




ClearLock 652

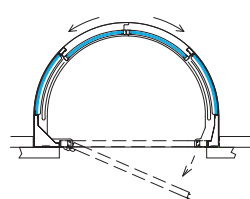

ClearLock 654



RevLock 611



InterLock 673

TRIPOD TURNSTILES

TR Series

Bidirectional TR tripod turnstiles are very robust products for sites with heavy use that can function equally well indoors and outdoors.

TR 490 TRIPOD TURNSTILE

- Passage width: 500 mm



TR 491 TRIPOD WITH DROPPING ARM

- Passage width: 500 mm



TBV Series

Bidirectional TBV 327 glass tripod turnstiles provide dissuasive, silent and user-friendly access control required by prestigious corporate facilities.

TBV 327 WAIST-HEIGHT GLASS TURNSTILE

- Passage width: 500 mm



FULL-HEIGHT TURNSTILES

TRS Series

Mainly used to lock down the perimeter of enclosed outdoor sites, our bidirectional full-height turnstiles ensure single-user throughput and are extremely weather-resistant.


TRS 370 3-SECTIONS FULL-HEIGHT TURNSTILE

- Single passage
- Passage width: 640 mm



TRS 371 4-SECTIONS FULL-HEIGHT TURNSTILE

- Single passage
- Passage width: 560 mm




TRS 372 3-SECTIONS FULL-HEIGHT TURNSTILE

- Double passage
- Passage width: 2 x 640 mm



OUTDOOR PRODUCTS

- Rising Barriers
- Extra-Long Barriers
- Security Barriers
- Fenced Barriers
- Parking Barriers
- Toll Barriers
- Rising Bollards
- Road Blockers

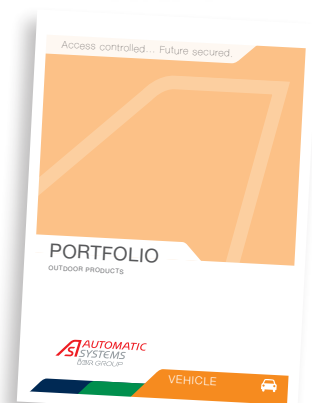

Find the Pedestrian Product for your needs

	Passages/minute ⁽¹⁾	Mobility Impaired	Passage Width (mm)	Obstacle Height (mm)	Footprint	Movement			Activation		Aesthetics		Automatic Opening in Case of Emergency
					Single Lane (mmxmm)	Retractable	Swing	Rotating	Motorised	Manual	Contemporary	Classic	
Security Entrance Lanes													
SmartLane 900					1200x1200	<1s				●		●	●
SmartLane 901	60		500-600	1000-1900	1200x1600	<1s				●		●	●
SmartLane 902					1200x2000	<1s				●		●	●
PNG 380					1270x1270	<1s				●		●	●
PNG 381	60		500-600	1000-1900	1270x1635	<1s				●		●	●
PNG 382					1270x2000	<1s				●		●	●
SmartLane 910 Twin					1550x1200	<1s				●		●	●
SmartLane 911 Twin	2x60		2x500-550	1000-1900	1550x1600	<1s				●		●	●
SmartLane 912 Twin					1550x2000	<1s				●		●	●
PNG 390 Twin					1585x1270	<1s				●		●	●
PNG 391 Twin	2x60		2x500-550	1000-1900	1585x1635	<1s				●		●	●
PNG 392 Twin					1585x2000	<1s				●		●	●
SmartLane 910		♿			1800x1200	<1s				●		●	●
SmartLane 911	60	♿	800-900	1000-1900	1800x1600	<1s				●		●	●
SmartLane 912		♿			1800x2000	<1s				●		●	●
PNG 390		♿			1870x1270	<1s				●		●	●
PNG 391	60	♿	800-900	1000-1900	1870x1635	<1s				●		●	●
PNG 392		♿			1870x2000	<1s				●		●	●
SlimLane 940			575-725		1000x1640	<1s		<1s		●		●	●*
SlimLane 950	60	♿	725-950	900-1700	1300x1640	<1s				●		●	●*
SlimLane 944			525-600		857x1640	1s				●		●	●*
SlimLane 945 Twin	2x60		2x525-600	900-1700	1565x1640	1s				●		●	●*
Swing Gates													
SmartLane 935	10	♿	900	1000-1900	1281x1199	4.5s				●		●	●
PMD 335		♿			1255x1270	4.5s				●		●	●
PMD 336	10	♿	900	1000-1900	1255x1635	4.5s				●		●	●
PMD 337		♿			1255x2000	4.5s				●		●	●
SL 930		♿					3s			●		●	
SL 931	20	♿	900	900-1200 1200-1900	215x1115		3s			●		●	
PPV 323	20	♿	1000	932	215x1215		3s			●		●	
Tripod Turnstiles													
TBV 327	15		500	932	1350x1350			●	●		●		
TR 490								●		●		●	
TR 491	20		500	760	765x1220			●		●		●	●
Full-Height Turnstiles													
TRS 370	15		640		1540x1370			●		●		●	
TRS 371	12		560	2290	1540x1529			●		●		●	
TRS 372	2x15		2x640		2400x1370			●		●		●	
Security Doors													
RevLock 600/610	15/20-30/40		750	2090	Ø 1800			●	●		●		
RevLock 601/611	12/16-24/32		1000		Ø 2300			●	●		●		
ClearLock 630	6		580	2005	Ø 1050	1.5s				●		●	
ClearLock 631	5		700	2045	Ø 1150	1.8s				●		●	
ClearLock 632	4	♿	900	2090	Ø 1485	1.9s				●		●	
ClearLock 633 Twin	2x4		2x580	2005	1800x1050	1.5s				●		●	
ClearLock 634 Twin	2x4		2x700	2045	2000x1150	1.5s				●		●	
ClearLock 640/643	6		580		1050x1050	1.5s				●		●	
ClearLock 641/644	5		700	2000	1150x1150	1.8s				●		●	
ClearLock 642	4	♿	900		1500x1500	1.9s				●		●	
ClearLock 650	7		580	2005	Ø 1050	1s				●		●	
ClearLock 651	6	♿	900	2090	Ø 1485	1.5s				●		●	
ClearLock 652	6	♿	900	2090	1450x1900	1.5s				●		●	
ClearLock 654			890	2090	1380x930	1.5s				●		●	
ClearLock 655		♿	1050	2400	2300x1540	2s				●		●	
InterLock 670	5	♿	900	2050	1600x1600	1.5s				●		●	
InterLock 671 Twin		♿	2x700	2050	2000x1600	1.5s				●		●	
InterLock 672 Twin	2x6	♿	700+900	2050	2300x1600	1.5s				●		●	
InterLock 673 Twin		♿	2x900	2050	2500x1600	1.5s				●		●	

Legend: * Option /⁽¹⁾ varies with access control systems