

RB M50_900

Technical datasheet

RB M50_900-FT-EN-12

Access controlled...
Future secured



RB M50 illustré avec borne en acier inoxydable en option.

The **RB M50 High-Security automatic rising bollard** is designed to protect and control access to sites that are susceptible to attempted break-in.

It can be used on any site where it is wished to create an obstacle to traffic without restricting pedestrian access.

In urban environments, it has the advantage of being completely invisible when lowered. It is also perfect for controlling vehicle access to pedestrian areas.

The high-security bollards have greater impact resistance than that of the other obstacles in the range (see technical characteristics below).

DESCRIPTION:

1. High-security obstacle comprising 25 mm thick steel cylinder.
The obstacle is available in 3 finishes*: painted steel, stainless painted steel or brushed stainless steel.
2. 30 mm thick cast aluminium crown.
The upper crown is also available with LED indicator lights (on the perimeter of the crown).*
3. 55 mm reflective strip.
4. Mobile obstacle supported on a thick steel section supporting structure.
5. 5 mm thick cast aluminium cover plate.
6. Galvanized sheet steel embedded casing with a steel frame at the top for attaching the obstacle.
7. Mobile obstacle is held vertically and strengthened by means of a thick steel collar connected to the supporting structure and a nylon bush built-in to the obstacle and sliding along the central jack.
8. Synthetic joint.
9. Double-acting central hydraulic jack for raising and lowering the obstacle. Obstacle not fixed to the jack to limit damages caused by small shocks.
10. Hydraulic unit mounted on the supporting structure producing 40 bars to maintain the obstacle in the raised position.
The hydraulic unit can also be equipped with an E.F.O. device*, acting as a booster to raise the bollard in case of emergency (1 s).
11. Obstacle stopped in raised and lowered positions by mechanical stops.
12. Steel/rubber bearings support the obstacle when in the retracted position, allowing it to withstand the passage of heavy vehicles (40T - Class Load D400).
13. Inductive sensors for raised and lowered position status information.
14. Remote microprocessor control board, separated from the obstacle (10 m of electric cable provided), dipswitch programming, LED display for obstacle status and inputs/outputs used.

* Product configuration to be specified when ordering.

SURFACE PROTECTION:

Treatment C

- Shot blasting (SA 23);
- Metallization
- 4 polymer layers

STANDARD TECHNICAL CHARACTERISTICS:

| | |
|--|---|
| Impact resistance certification(s): | |
| Certified: DOS K12/L1. | Rated in compliance with: PAS67:2013 V/7500(N3)/80/90 IWA 14-1:2013 V/7200(N3C)/80/90 ASTM M50 |
| Impact resistance: (type of vehicles) | 3,5 T at 112 km/h 7,2 T at 80 km/h. |
| Impact resistance: | 2.000 000 joules. |
| Impact resistance with guaranteed operation: | 700 000 joules |
| Power supply: | 230 V*single phase. |
| Frequency: | 50/60 Hz. |
| Nominal power: | 1700 W. |
| Raising speed: | 4 sec. |
| Lowering speed: | 4 sec. |
| Working temperature: | -15 to +60°C. |
| Frequency of use: | 2000 operations per day. |
| MCBF (Mean Cycles Between Failure) | 3.000.000 de cycles, respecting the recommended maintenance. |
| Poids: | Bollard: 590 kg; Pit: 295 kg} |
| Protection index: | IP 67 for hydraulic components. |
| Complies with European standards. | |

* do not connect to a floating network or to high impedance earthed industrial distribution network.

WORK TO BE REALISED BY THE CUSTOMER:

- Embedding casing in a concrete foundation (refer to installation drawing).
- Drainage or connection to mains drainage (if necessary).
- Power supply.
- Electric connections with external peripherals.

OPTIONAL



1. Upper crown with LEDs flashing indicator lights.
2. Pit in aluzinc or stainless steel AISI304.
3. Metal trap for closing counterframe.
4. Intermittent audible signal with or without warning given prior to obstacle operation.
5. Other RAL colour.
6. Biodegradable fuchs oil into the hydraulic pump.
7. Additional cable lengths (to connect the bollard unit to the central logic box) (maximum length: 60 meters - Supplied in multiple of 5 m).
8. Pair of quick release bollard cable connector - IP68
9. Heating resistance for operation at a temperature down to -40°C in case of use in areas that are highly exposed to snow or prolonged freezing.
10. Moving cylinder in stainless steel brushed AISI 316.
11. Leaf covering (Gold, silver, Copper or Bronze).
12. Emergency Fast Opening (EFO: 1,5s).
13. Device for manual operation (if power failed).
14. UPS group for working max. 1 RB in case of power failed.
15. Feeder/accumulator group on control panel for emergency lowering if power failed.
16. Kit Up/Down to signal position - Up - Down.
17. Alarm kit - 1 status contact RB high - 1 status contact RB crown.
18. Floor metallic column with foundation bracket.
19. Heating device for control unit.
20. Red/Green LEDs traffic lights (Ø 100 mm).
21. Galvanized stake Ø105 mm for traffic light.
22. Inductive detector for inductive loop.
23. GSM activator for remote control.
24. Timer programmer (Weekly or Yearly).
25. Additional cables junction box with gel.
26. Pressure gauge with connection to show pressure in the hydraulic pump.
27. Vehicle inductive loop.
28. Photo-electric cell (T/R or Reflex).
29. Cell support post.
30. Radio transmitter/receiver.
31. Push button box.
32. High security lock for the control unit.
33. LEDs lighting device and 230V plug inside the control unit.

RB M50_900



Datasheet
RB M50_900-FT-EN-12

STANDARDS DIMENSIONS (mm)

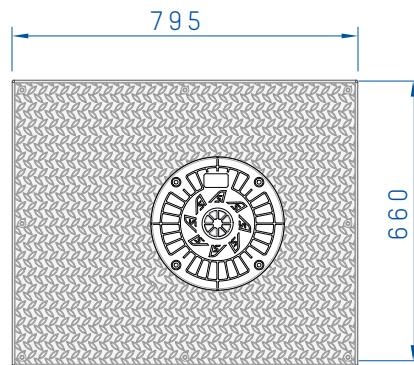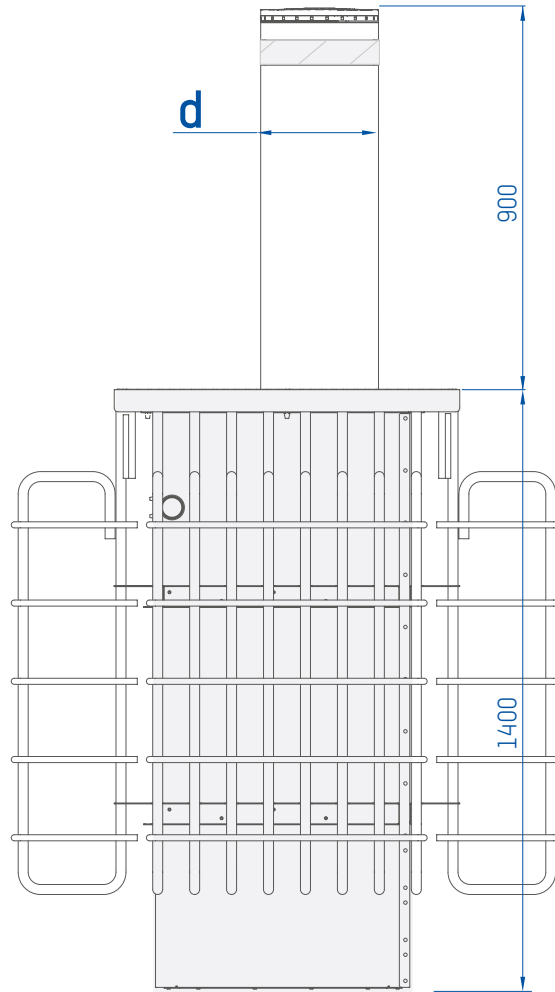

| d | |
|--------------------------|----------|
| Steel cylinder | Ø 271 mm |
| Stainless steel cylinder | Ø 271 mm |

International & Headquarters

Automatic Systems SA

5 avenue Mercator
1300 Wavre - Belgique
Tel.: +32.(0)10.23.02.11

Email: sales.asgroup@automatic-systems.com

Belgium

Automatic Systems SA (Bruxelles & Wallonie)

5 avenue Mercator
1300 Wavre - Belgique
Tel.: +32.(0)10.23.02.11

Email: sales.be@automatic-systems.com

Automatic Systems Vlaanderen

Prins Boudewijnlaan 17 Unit 9A
2550 Kontich - Belgique
Tel.: +32.(0)3.870.59.59

Email: sales.be@automatic-systems.com

France

Automatic Systems SAS - Persan

22, rue du 8 mai 1945
95340 Persan - France
Tel.: +33.(0)1.30.28.95.50

Email: sales.fr@automatic-systems.com

Automatic Systems SAS - Suresnes

3 Rue Salomon De Rothschild
92150 Suresnes
Tel.: +33.(0)1.41.11.40.20

Email: sales.fr@automatic-systems.com

Automatic Systems SAS - Lyon

Immeuble Le Québec
685, rue Juliette Récamier
69970 Chaponnay - France
Tel.: +33.(0)1.30.28.95.50

Email: sales.fr@automatic-systems.com

Spain

Automatic Systems Española SAU

Calle Bolivar, nº 24 Portal B 2º D
28045 Madrid - España
Tel.: +34.(0)91.659.07.66

Email: sales.es@automatic-systems.com

Automatic Systems Española SAU

Calle Vallés, 52-54 - El Prat de Llobregat
08820 Barcelona - España
Tel.: +34.(0)93.478.77.55

Great Britain

Automatic Systems Equipment UK Ltd.

Units 18 - 19 Babbage House
Northampton Science Park
Kings Park Road
Northampton
NN3 6LG - UK
Tel.: +44 (0)16.04.65.42.10

Email: sales.uk@automatic-systems.com

Deutschland

Vertrieb Deutschland

Schwertlacke 3
59425 Unna
Tel.: 02303 / 943295
Mobil: 015 223 229 229

Canada

Automatic Systems America Inc.

4005 Matte blvd., unit D
Brossard J4Y 2P4 - Canada
Tel.: +1 450 659 07 37

Email: sales.nam@automatic-systems.com

United States

Automatic Control Systems Inc.

45 Rockefeller Plaza, suite 2000
New York City, NY 10111 - USA
Tel.: +1 516 944 94 98

E-mail: sales.nam@automatic-systems.com