

Technical datasheet

SL 900-FT-EN-13


Access controlled...
Future secured



Designed for intensive use in intra-building sites, the **SmartLane 900** security entrance lane provides dissuasive control of pedestrians taller than 1 m, with or without luggage, in both directions.

With its mechanical design and embedded electronics, the equipment guarantees an average level of security (*prevention of fraud*) and a high level of safety (*protection of users during operation*).

The gate can be installed in series, in which case it is necessary to define left-hand, right-hand and intermediate housings (*with a mobile leaf on both sides of the housing*).

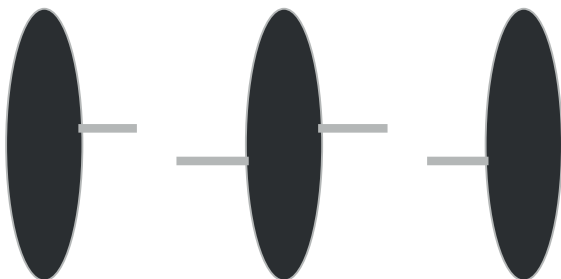

SmartLane
900
left

SmartLane
900
intermediate

SmartLane
900
right

DESCRIPTION

1. Self-supporting frame (made from galvanized steel) integrating the electromechanical drive assembly for each mobile leaf, the photoelectric cells for the detection of the presence of users, and the control boards.
2. Brushed AISI 304L stainless steel housing.
3. Brushed AISI 304L stainless steel side panels with key lock, allowing easy access to the electromechanical unit and the control boards.
4. Monolithic clear 12 mm thick tempered glass leaf, retracting completely into the body on opening.
5. Black laminate top cover (*stainless steel around the fixed glass if any: i.e. for mobile leaf height > 1000 mm*).
6. Electromechanical unit consisting of:
 - A three-phase asynchronous reduction motor.
 - Secondary transmission with crank-and-rod linkage ensuring perfect mechanical locking in both extreme positions.
 - A device for automatic opening of the mobile leaves in the event of a power failure.
 - A variable-speed controller ensuring progressive accelerations and gradual decelerations, for a movement without vibration and for protection of the mechanism and the users in the event of contact with the mobile leaves.
 - An inductive sensor controlling the position of the mobile leaf.
7. Dual AS1300 control board ensuring the management of the gate and providing support for various control options and/or accessories. An LCD allows navigation in the drop-down menus and the modification of certain parameters.
8. Transfer of information through potential-free contacts: passage authorization, passage information, defect, state of the gate (*free, prohibited, alarm...*).
9. Orientation pictogram, indicating the state of the gate to the user (*in service or out of service*)...
10. Photoelectric cells for detecting presence, ensuring the control of the movement of the users through the gate as well as their safety during the movements of the mobile leaves.


STANDARD TECHNICAL CHARACTERISTICS

Electrical supply	Single-phase 230 VAC + ground, 50/60 Hz. <i>(Do not connect to a floating network or to high impedance earthed industrial distribution network.)</i>
Motor	Three-phase asynchronous 120 W.
Nominal consumption	250 W / per gate.
Ambient T° of operation	from 0 °C to +50 °C
Net weight of a gate	Depending on its configuration (<i>left, right, intermediate</i>): between 150 kg and 230 kg.
Min opening or closing times	Opening time: 0.3 s Closing time: 0.5 s (<i>minimum movement times, configurable. These times do not take into account the reaction of the access control system. The passage request memory function makes it possible to accelerate the flow: no closing between 2 requests</i>)
MCBF	<i>(Average number of cycles between breakdowns), when respecting recommended maintenance: 5.000.000.</i>
IP	40
Communication	CAN bus communication between the various modules making up the passage.
CE	Conforms to CE standards. <i>The silicon protection strip on mobile leaf option is necessary to comply with the norms related to impact force.</i>

PRECAUTIONS FOR USE

- For security reasons, children (user smaller than 1 m tall) must be supervised by an adult at all times when in the vicinity of the unit and during passage through the lane.
- A child must absolutely precede the accompanying adult when lane passage is required.
- If habitual use by children is anticipated, Automatic Systems recommends the addition of all options required to optimize the level of protection.

STANDARD DIMENSIONS (mm)

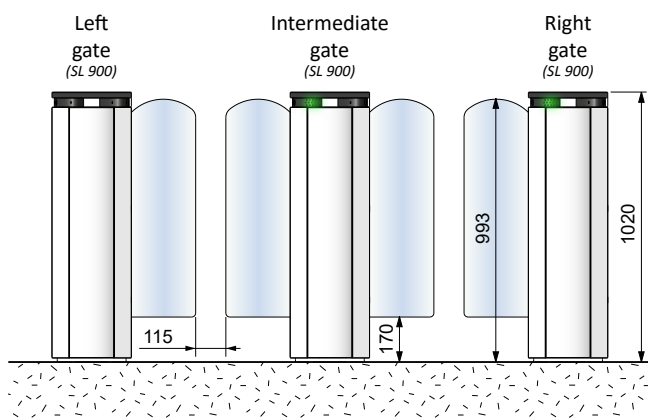

OPTIONS

1. Glass leaves of non-standard height - 1200, 1700 or 1900 mm.
2. Protective section for mobile glass leaves, all heights.
3. Group of protection cells on fixed glass leaves of 1200, 1700 or 1900 mm.
4. Enhanced electronic protection cell kit (*A and B directions*).
5. Trolley protection cell kit.
6. Enhanced electronic protection and trolley protection cell kit.
7. "Free opening" cell kit.
8. Function pictogram, per direction.
9. External support kit for reader integration on housing or on extension.
10. Electromagnets to lock obstacles in open position in case of power failure (*per lane*).
11. Power supply 120 V – 60 Hz (*per lane*).
12. Personalized logo on glass – sandblast effect sticker.
13. Painted stainless steel panels.
14. Laminate top cover.
15. Stainless steel top cover.
16. Smart 'n Slim monitoring panel.

For restrictions on options, refer to the price list.

WORK TO BE PROVIDED BY THE CUSTOMER

- Bolting the unit to the floor.
- Power supply.
- Cabling between gates in the same array.
- Cabling to any external peripherals.
- Integration of any accessories

Comply with the installation drawing.

