


## Technical datasheet

SL 912Twin-FT-EN-13



Access controlled...  
Future secured

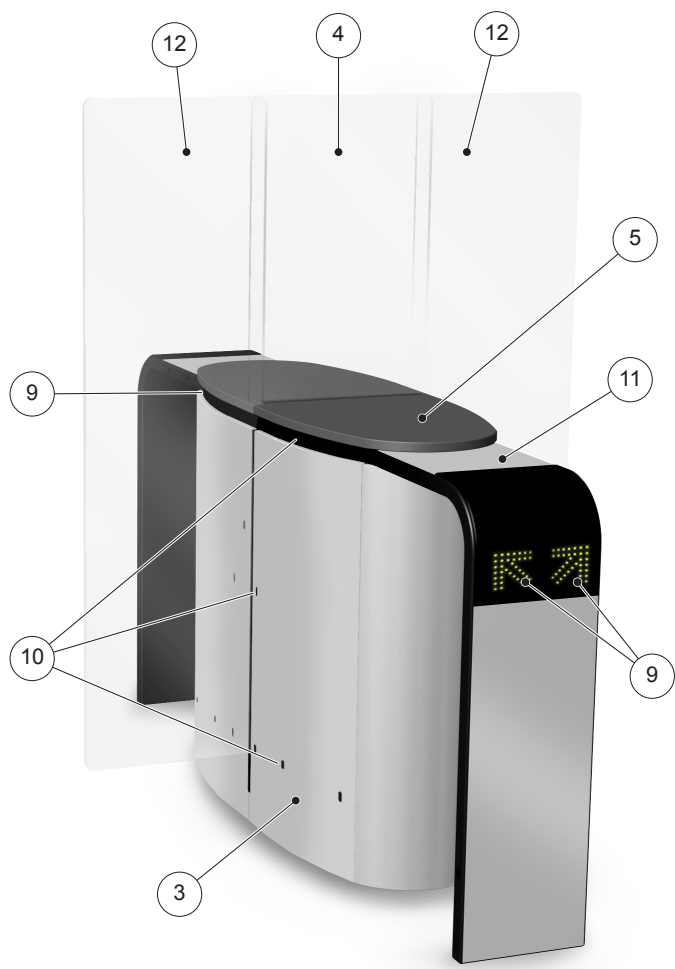

## DESCRIPTION

1. Self-supporting frame (*made from galvanized steel*) integrating the electromechanical drive assembly for each mobile leaf, the photoelectric cells for the detection of the presence of users, and the control boards.
2. Brushed AISI 304L stainless steel housing.
3. Brushed AISI 304L stainless steel side panels with key lock, allowing easy access to the electromechanical unit and the control boards.
4. Monolithic clear 12 mm thick tempered glass leaf, retracting completely into the body on opening.
5. Black laminate top cover (*stainless steel around the fixed glass if any: i.e. for mobile leaf height > 1000 mm*).
6. Electromechanical unit consisting of:
  - A three-phase asynchronous reduction motor.
  - Secondary transmission with crank-and-rod linkage ensuring perfect mechanical locking in both extreme positions.
  - A device for automatic opening of the mobile leaves in the event of a power failure.
  - A variable-speed controller ensuring progressive accelerations and gradual decelerations, for a movement without vibration and for protection of the mechanism and the users in the event of contact with the mobile leaves.
  - An inductive sensor controlling the position of the mobile leaf.
7. Dual AS1300 control board ensuring the management of the gate and providing support for various control options and/or accessories. An LCD allows navigation in the drop-down menus and the modification of certain parameters.
8. Transfer of information through potential-free contacts: passage authorization, passage information, defect, state of the gate (*free, prohibited, alarm...*).
9. Orientation pictogram, indicating the state of the gate to the user (*in service or out of service*)...
10. Photoelectric cells for detecting presence, ensuring the control of the movement of the users through the gate as well as their safety during the movements of the mobile leaves.
11. Extension, allowing to increase the level of safety by increasing the number of detection cells and to integrate an optional access control system (*badge reader for example*).
12. Fixed glass preventing climbing over the gate.

Designed for the heavy use in intra-buildings, the **SmartLane 912Twin** security entrance lane ensures an effective, reliable anti-fraud and rapid control of pedestrians taller than 1 m, with or without luggage, in one direction of passage.

The **SmartLane 912Twin** makes it possible to control 2 corridors independently.

The **SmartLane 912Twin** is installed between 2 walls, partitions or railings on which the reflectors are fitted that are needed for the operation of the detection cells.

With its mechanical design and its embedded electronics, the equipment guarantees high levels of safety (*prevention of fraud*) and safety (*protection of the users during operation*).


## STANDARD TECHNICAL CHARACTERISTICS

Electrical supply	Single-phase 230 VAC + ground, 50/60 Hz. <i>(Do not connect to a floating network or to high impedance earthed industrial distribution network.)</i>
Motor	Three-phase asynchronous 120 W.
Nominal consumption	270 W / per gate.
Ambient T° of operation	from 0 °C to +50 °C
Net weight of a gate	290 kg.
Min opening or closing times	Opening time: 0.7 s Closing time: 0.8 s <i>(minimum movement times, configurable. These times do not take into account the reaction of the access control system. The passage request memory function makes it possible to accelerate the flow: no closing between 2 requests)</i>
MCBF	<i>(Average number of cycles between breakdowns), when respecting recommended maintenance: 5.000.000.</i>
IP	40
Communication	CAN bus communication between the various modules making up the passage.
CE	Conforms to CE standards. <i>The silicon protection strip on mobile leaf option is necessary to comply with the norms related to impact force</i>

## PRECAUTIONS FOR USE

- For security reasons, children (*user smaller than 1 m tall*) must be supervised by an adult at all times when in the vicinity of the unit and during passage through the lane.
- A child must absolutely precede the accompanying adult when lane passage is required
- If habitual use by children is anticipated, Automatic Systems recommends the addition of all options required to optimize the level of protection.

## STANDARD DIMENSIONS (mm)

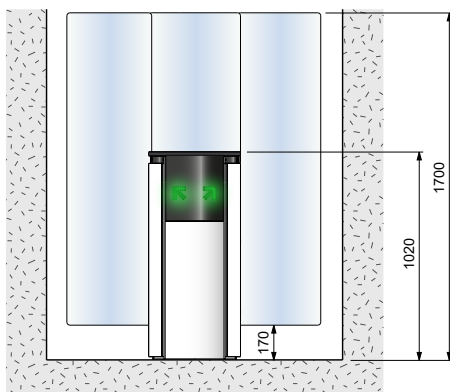

## OPTIONS

1. Glass leaves of non-standard height - 1000, 1200 or 1900 mm.
2. Protective section for mobile glass leaves, all heights.
3. Enhanced electronic protection cell kit (*A and B directions*).
4. Trolley protection cell kit.
5. Enhanced electronic protection and trolley protection cell kit.
6. "Free opening" cell kit.
7. Function pictogram, per direction.
8. External support kit for reader integration on housing or on extension.
9. Electromagnets to lock obstacles in open position in case of power failure (*per lane*).
10. Power supply 120 V – 60 Hz (*per lane*).
11. Personalized logo on glass – sandblast effect sticker.
12. Painted stainless steel panels.
13. Extension with stainless steel filler panels.
14. Laminate top cover.
15. Stainless steel top cover.
16. Smart 'n Slim monitoring panel.

 For restrictions on options, refer to the price list.

## WORK TO BE PROVIDED BY THE CUSTOMER

- Bolting the unit to the floor.
- Power supply.
- Cabling between gates in the same array.
- Cabling to any external peripherals.
- Integration of any accessories

 Comply with the installation drawing.

