


DESCRIPTION

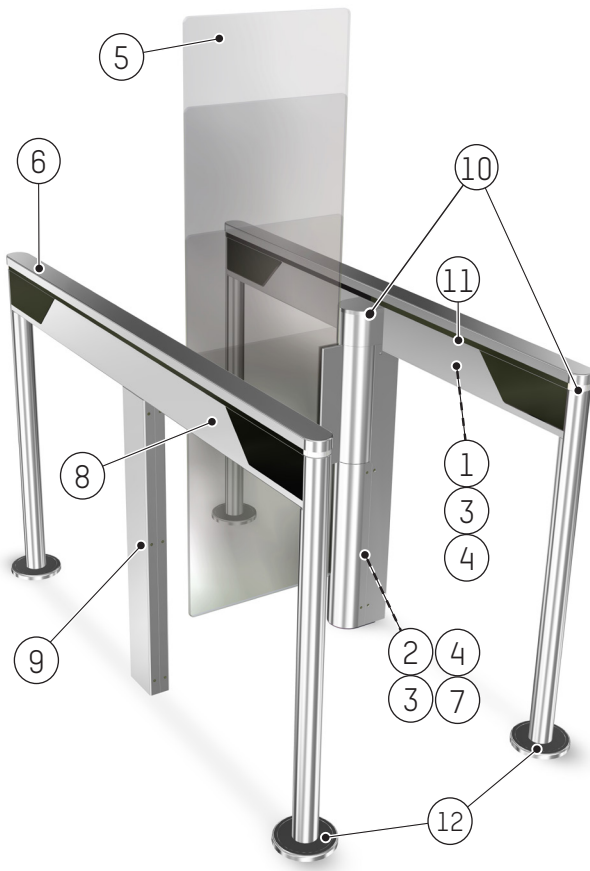

The SlimLane 944 SC single swing door security entrance lane offers a high bidirectional throughput and uncompromising security.

With its transparent, elegant design and **minimal footprint**, the SlimLane 944 SC is designed to integrate perfectly into any architectural style.

The SlimLane 944 SC offers a **single compact passageway**, suitable for confined installation spaces.

Equipped with high processing capacity and an exclusive detection system, the SlimLane 944 SC guarantees accurate user tracking and prevents any unauthorised use.

The SlimLane 944 SC is a modular product that can be installed as a single or a multi-lane array by combining with the SlimLane 945 SC Twin dual compact lane, the SlimLane 940 SC standard lane and SlimLane 950 SC wide lane models.



SL 950SC + SL 944SC + SL 945SC Twin

1. Handrail frame: steel beam with RoHS anti-corrosion zinc plating treatment and stainless steel posts. The handrail includes photoelectric cells for user detection and the logic control board.
2. Self-supporting kinematic steel frame with RoHS anti-corrosion zinc plating treatment. The frame contains the electromechanical drive assembly for the swinging obstacle and the electronic control boards.
3. Brushed #4 AISI 304L stainless steel housing.
4. Brushed #4 AISI 304L stainless steel panels fastened to the frame for access to the internal components.
5. Clear, 10 mm thick tempered monolithic glass obstacles, swinging in the direction of user passage.
6. Brushed #4 AISI 304L stainless steel top cover.
7. Electromechanical drive units each consisting of:
 - A DC permanent magnet motor with epicyclic gearbox.
 - A controller providing progressive accelerations and decelerations of the obstacle, for smooth movement and enhanced user safety.
 - A geared electromagnetic brake for locking of obstacles in the event of forced entry attempts.
 - A sensor controlling the obstacle position.
 - SECURI-SAFE standard operating mode: electromechanical lock of the obstacles in case of forced entry attempt in any passage directions.
8. AS1167 logic control board, equipped with ARM technology and the Linux operating system, ensuring advanced traffic management. An embedded Web server, accessible by a simple web browser, offering an interface for the configuration of functional gate parameters as well as a complete diagnostic and maintenance tool.
9. Transfer of information from XML-RPC protocol through an Ethernet or USB interface, and dry contacts: passage authorisation, passage information, reader locking, fraud, equipment failure, ...
10. Orientation and function pictograms indicating gate and passage status to the user.
11. Proprietary DIRAS detection system, consisting of a high-density matrix of infrared transmitter/receiver photocells beams. It follows users progression through the gate as well as ensuring their safety during opening/closing of the obstacles.
12. Finishing plate for post.

STANDARD TECHNICAL CHARACTERISTICS

(per lane)

Electrical supply	Single phase 110-240 VAC (+/-10%) - 5A - 50/60 Hz + Ground
Power consumption	Standby: 50 W Cycle: 170 W Maximum: 300 W
Motors (x2)	24 VDC – nominal output power 93 W
Passageway (L)	550 mm 485 mm < L < 560 mm (min/max)
Min opening or closing times	0,9 s <i>(Depending on the access control system reactivity and the speed of users)</i>
Ambient operating Temperature	0 to +50°C
Ambient relative humidity in operation	< 95%, no condensation
MCBF	5,000,000 mean cycles between failures, with recommended maintenance.*
Sound level	55 dB
Weight	64 kg <i>(kinematic unit)</i> 40 kg <i>(handrail)</i>
IP	40

Conforms to European standards

* Maintenance operations are detailed in the technical manual.

PRECAUTIONS FOR USE

- For security reasons, children (*user smaller than 1 m tall for mobile obstacles of 900 mm height and smaller than 1,3 m for mobile obstacles from 1200 mm to 1700 mm height*) must be supervised by an adult at all times when in the vicinity of the unit and during passage through the lane.
- A child must absolutely precede the accompanying adult when lane passage is required.
- If habitual use by children is anticipated, Automatic Systems recommends the addition of all options required to optimize the level of protection.

WORK TO BE PROVIDED BY THE CUSTOMER

- Bolting the unit to the floor.
- Power supply.
- Cabling between gates in the same array.
- Cabling to any external peripherals.
- Integration of any accessories


Note: Comply with the installation drawing.

OPTIONS


1. EGRESS operating mode: obstacles open in the direction of egress by a simple push.
2. Battery backup for automatic opening in case of power failure and obstacles locking mechanism in egress direction.
3. High glass mobile obstacle: 1200, 1500 or 1700 mm.
4. End post without bottom flange.
5. External fixed glass obstacle.
6. Fixing of external fixed glass obstacle.
7. Transparent glass side wall with enhanced electronic protection and 'trolley' protection cells kit (*A and B directions*).
8. Transparent glass side wall.
9. Fixed glass panel LED lighting kit.
10. Personalised logo on mobile glass obstacle (*sticker like sand blasting*).
11. Black top cover made of Kraft FK.
12. Extension housing.
13. Extended extension housing.
14. Angled housing on passage for extension housing.
15. Integration kit for extension housing or angled housing.
16. Hinged access door for extension housing.
17. Visitor badge bin and hinged door for extension housing.
18. Integrated token acceptor with receptacle and hinged door.
19. Token Ø 28 or Ø 30 mm.
20. Independent support post, including the standard reader integration.
21. External support kit for reader integration on housing.
22. Fixing frame to embed in the concrete, to fix the equipment and pass the electric cables.
23. Smart 'n Slim (*PC for supervision*).
24. Connectivity kit for Ethernet connection of one or more lanes to the network.
25. Low or high fixed handrail.

Note: For restrictions on options, refer to the price list.

STANDARD DIMENSIONS FOR SLIMLANE 944SC

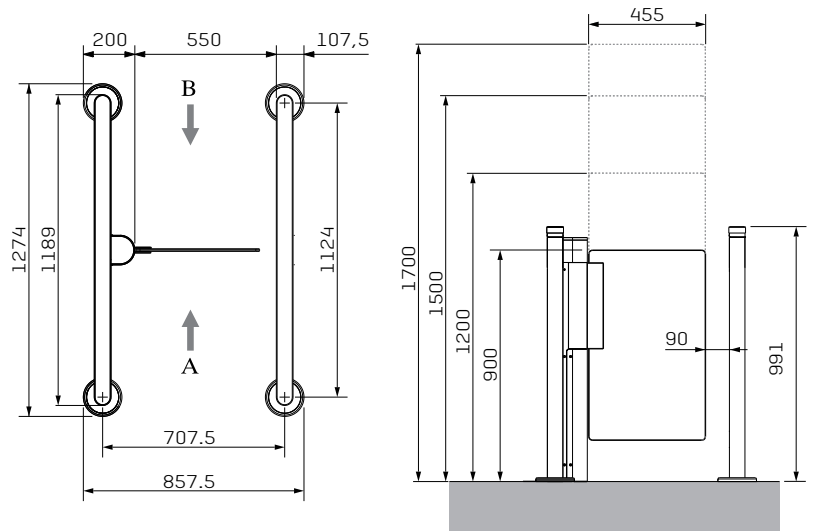


STANDARD DIMENSIONS FOR SLIMLANE 944SC EP (OPTION)

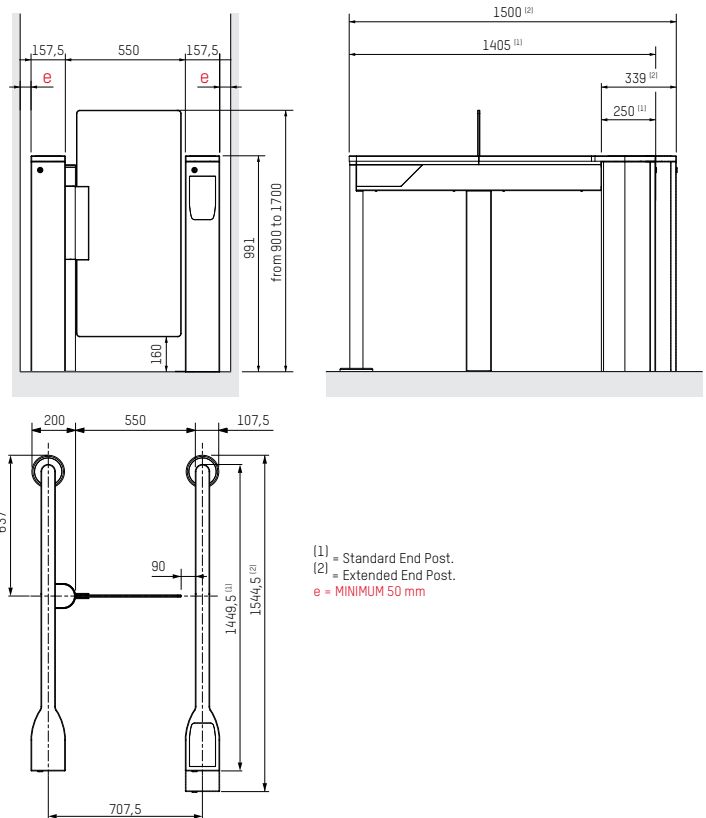


Available volumes for reader integration:

If a doubt exists concerning the reader who will be used, please, contact your commercial responsible.

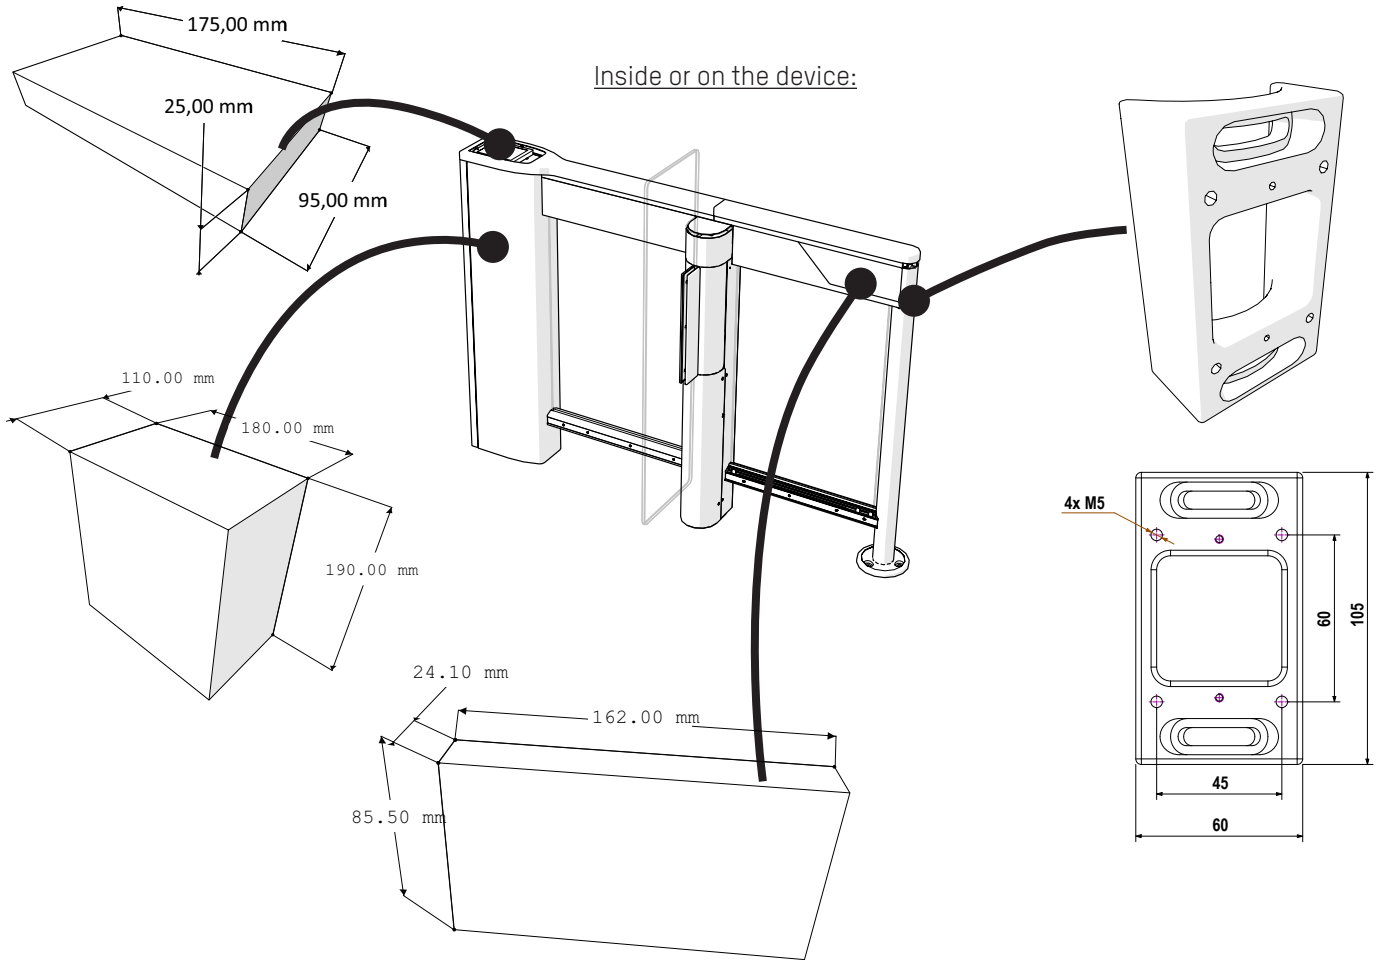

On external long post :

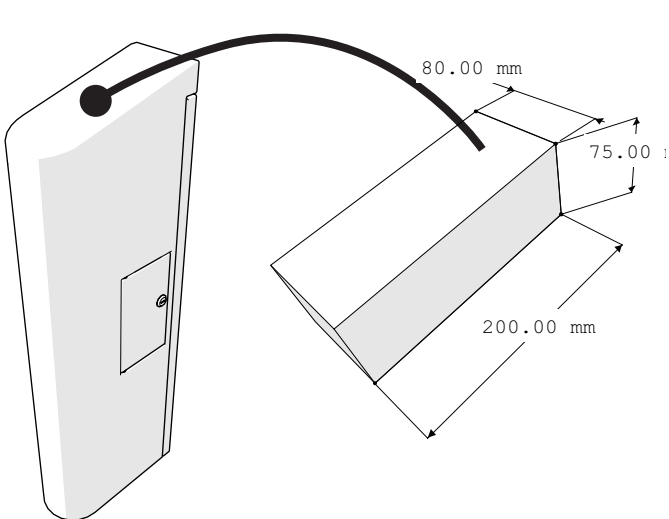

On external short post:

