

Pedestrian

Products Portfolio



AS **AUTOMATIC**
SYSTEMS

Access controlled...
Future secured



Security Entrance Lanes

SlimLane Series - Aesthetics & Security

Featuring a streamlined design, SlimLane's double swing door security entrance lanes combine high throughput (opening time < 1 sec.) with advanced user protection while providing a minimal footprint.

SlimLane - 2 doors

SlimLane 940-940SC

STANDARD LANE

- Passage width: 600 mm (from 550 to 725 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L): 1000 x 1640 mm/1000 x 1274 mm (SC)



* picture with trolley detection, side glass and end-post extensions (EP)

SlimLane 950-950SC

WIDE LANE

- Passage width: 550 mm (from 550 to 600 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L): 1300 x 1640 mm/1300 x 1274 mm (SC)



SlimLane 950EW

EXTRA-WIDE LANE

- Passage width: 1200/1400 mm
- Obstacle heights: 900 mm
- Footprint (W x L): 1600 x 1640 mm




ServiceLane

SERVICE LANE

- Passage width: 900 mm
- Obstacle heights: 1000/1200 mm
- Footprint (W x L): same dimensions as intermediate cabinets 940/950/944



CONFIGURATION EXAMPLES

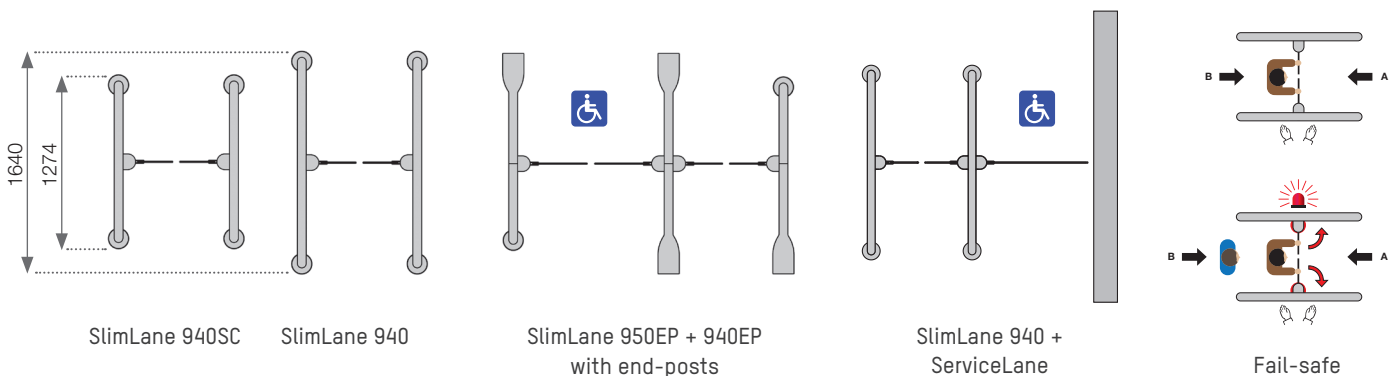

Security Entrance Lanes

SlimLane Series - Greater modularity

A compelling product offering:

- standard or short cabinets
- standard or wide lanes with end-post extensions (EP)
- 1 or 2 doors
- low or high obstacles
- 2 operating modes - Securi-safe or Egress

SlimLane - 1 door

SlimLane 944-944SC

COMPACT LANE

- Passage width: 550 mm (from 550 to 600 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L): 857 x 1640 mm/857 x 1274 mm



* picture with end-post extension (EP)

SlimLane 945-945SC Twin

DUAL COMPACT LANE

- Passage width: 900 mm (from 725 to 950 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L): 1300 x 1640 mm/1565 x 1274 mm (SC)


SlimLane 950+944+944

WITH END-POST EXTENSIONS (EP)

- Installation example with maximum throughput and minimum footprint
- Footprint (W x L): 2719 x 1450 mm (1 wide lane + 2 standard lanes)



CONFIGURATION EXAMPLES

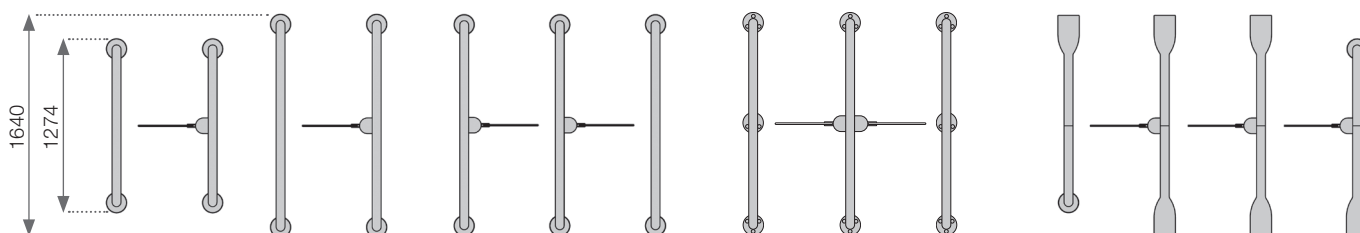

SlimLane 944SC

SlimLane 944

Double lane
SlimLane 944

SlimLane 945 Twin

Triple lane SlimLane 944
with end-posts (EP)

Security Entrance Lanes

SmartLane Series

The elegant and discreet design of the SmartLane range of high security, bidirectional speed gates (opening time < 1 sec.), blends seamlessly into any type of architecture.

SmartLane 900

STANDARD LANE WITH
COMPACT FOOTPRINT

- Passage width:
from 500 to 600 mm
- Obstacle heights:
1000/1200/1700/1900 mm
- Footprint (W x L): 1200 x 1200 mm



SmartLane 910-911-912

WIDE LANE

- Passage width:
from 800 to 900 mm
- Obstacle heights:
1000/1200/1700/1900 mm
- Footprint (W x L):
1800 x 1200-1600-2000 mm



* picture SmartLane 910

SmartLane 901

STANDARD LANE WITH ENHANCED
ENTRANCE CONTROL

- Passage width:
from 500 to 600 mm
- Obstacle heights:
1000/1200/1700/1900 mm
- Footprint (W x L): 1200 x 1600 mm



SmartLane 910-911-912 Twin

DUAL LANE WITH
COMPACT FOOTPRINT

- Passage width: 2 x 500 mm
- Obstacle heights:
1000/1200/1700/1900 mm
- Footprint (W x L):
1550 x 1200-1600-2000 mm



* picture SmartLane 910 Twin

SmartLane 902

STANDARD LANE WITH ENHANCED
ENTRANCE / EXIT CONTROL

- Passage width:
from 500 to 600 mm
- Obstacle heights:
1000/1200/1700/1900 mm
- Footprint (W x L):
1200 x 2000 mm




SmartLane 935

MATCHING SMARTLANE 90X / 91X

- Passage width: 900 mm
- Obstacle heights:
1200/1700/1900 mm
- Footprint (W x L):
1280 x 1200 mm



CONFIGURATION EXAMPLES

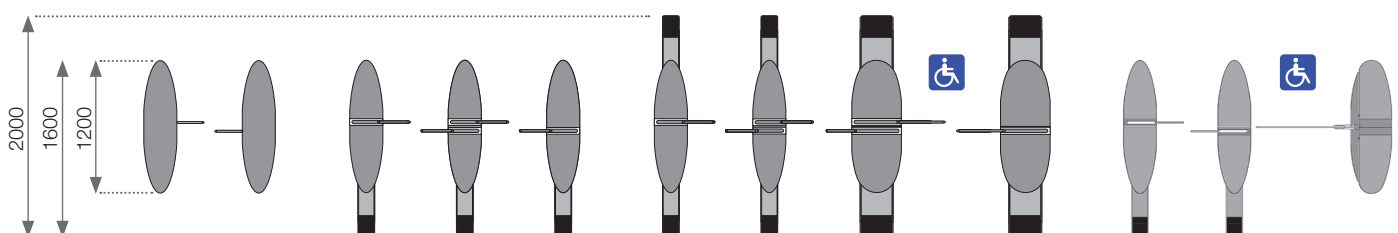

SmartLane 900

SmartLane 901

SmartLane 902 + SmartLane 912

SmartLane 901 +
SmartLane 935



Security Entrance Lanes

FirstLane Series

FirstLane double swing door security turnstiles provide a high bi-directional flow and safety without compromise. With its modern and stylish design, FirstLane is perfectly suited to any type of architecture. Its exclusive detection system ensures precise user tracking for maximum safety and security. FirstLane combines high throughput with state-of-the-art detection.

FirstLane

- Passage width: 600/900 mm
- Obstacle height: 910 mm
- Footprint (W x L): 990 x 1300 mm / 1290 x 1300 mm



STANDARD LANE



WIDE LANE


Swing Gates

AccessLane Series

Bidirectional swing gates can be used alone or in conjunction with others products such as SmartLane, TriLane, SlimLane. They can be installed discretely and aesthetically in the entrance areal of buildings.

AccessLane 933

- Passage width: 900 mm
- Obstacle heights: 900/1000/1200 mm
- Footprint (W x L): 1000 x 220 mm




AccessLane 934


- Passage width: 900 mm
- Obstacle heights: 1500/1700/1800/1900 mm
- Footprint (W x L): 1535 x 220 mm



CONFIGURATION EXAMPLES



Standard double lane FirstLane

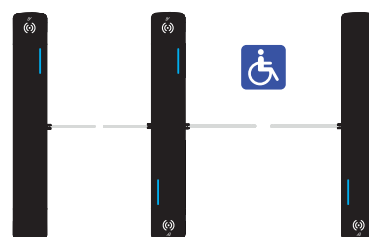

Standard and wide Firstlane lane combination

Tripod Turnstiles

TriLane Series

Bidirectional TriLane tripod turnstiles are robust products for sites with heavy use. They can function equally well indoors and outdoors.



TL1 Standard



TL1 Stainless steel



TL2 Standard



TL2 Hybrid



TL2 Stainless steel

TriLane TL 1

TRIPOD TURNSTILE

- Passage width: 550 mm
- Footprint (W x L): 849 x 400 mm

TriLane TL 2

TRIPOD TURNSTILE

- Passage width: 550 mm
- Footprint (W x L): 745 x 1300 mm

Full-Height Turnstiles

TRS Series

Mainly used to lock down the perimeter of enclosed outdoor sites, our bidirectional full-height turnstiles ensure single-user throughput and are extremely weather-resistant.

TRS 370

3-SECTIONS FULL-HEIGHT TURNSTILE

- Single passage
- Passage width: 640 mm



TRS 371

4-SECTIONS FULL-HEIGHT TURNSTILE

- Single passage
- Passage width: 560 mm



TRS 372

3-SECTIONS FULL-HEIGHT TURNSTILE

- Double passage
- Passage width: 2 x 640 mm



TRS 373

4-SECTIONS FULL-HEIGHT TURNSTILE

- Double passage
- Passage width: 2 x 560 mm



TRS PMR

SECURITY DOOR DESIGNED FOR PERSONS WITH REDUCED MOBILITY (PRM)

- It can be fully integrated with the TRS37x range for side-by-side or remote installation
- The bidirectional door is available in motorized or manual version
- Passage width: 1050 mm



Security Doors

ClearLock Series

ClearLock automatic security booths are cylindrical doors that provide very strict access control, specially adapted to sensitive sites.

ClearLock 63x

ROUND SECURITY BOOTHS



ClearLock 64x

SQUARE SECURITY BOOTHS



ClearLock 65x

EXTENDED SECURITY BOOTHS



ClearLock 66x

SEMI-CIRCULAR SECURITY BOOTHS



1. Passage widths: between 580 and 900 mm
2. Single passage detection
3. Metal detection

4. Bullet-proof glass EN1063 (*)
5. Force-entry resistance EN1627-1630/ LPS1175 SR1-2-3 (*)
6. Intrinsic mechanical opening (*)

RevLock Series

RevLock automatic revolving security doors are designed to provide high-security access control with high throughput.

RevLock 60x-614

REVOLVING DOORS WITH WEIGHT DETECTION

1. Doors with 3 or 4 sections
2. External diameters: 1800/2000/2300 mm (*)
3. Single passage detection



RevLock 60xT

REVOLVING DOORS WITH 3D VIDEO DETECTION

4. Bullet-proof glass EN1063 (*)
5. Forced-entry resistance EN1627-1630 (*)
6. Night doors and folding doors (*)



InterLock Series

InterLock rectangular security booths are equipped with flat glass doors, providing access control that is particularly recommended for public sites.

InterLock 67x

AUTOMATIC SECURITY BOOTHS WITH FLAT DOORS

1. Passage widths: 700 or 900 mm
2. Single passage detection
3. Metal Detection



InterLock 68x


MANUAL SECURITY BOOTHS WITH FLAT DOORS

4. Single or double passage (*)
5. Bullet-proof glass EN1063 (*)
6. Intrinsic mechanical opening (*)




(*) depending on the model


CONFIGURATION EXAMPLES



ClearLock 63x



ClearLock 64x



ClearLock 65x



ClearLock 66x



InterLock 67x



RevLock 60x

 Find the Pedestrian Product for your needs		Passages/minute ⁽¹⁾	Mobility Impaired	Passage Width (mm)	Obstacle Height (mm)	Footprint	Movement			Activation		Aesthetics		Automatic Opening in Case of Emergency
						Single Lane (mmxmm)	Retractable	Swing	Rotating	Motorised	Manual	Contemporary	Classic	
SECURITY ENTRANCE LANES														
SlimLane 940	60		575-725	900-1700	1000 x 1640		<1s			●		●		● *
SlimLane 950			725-950		1300x1640		<1s			●		●		● *
SlimLane 950EW	50		1200-1400	900	1600x1640		1.2s			●		●		● *
SlimLane 944	60		525-600	900-1700	857 x 1640		1s			●		●		● *
SlimLane 945 Twin	2x60		2x525-600		1565 x 1640		1s			●		●		● *
SlimLane 940SC	60		575-725	900-1700	1000x1274 (2)		<1s			●		●		● *
SlimLane 950SC			725-950		1300x1274 (2)		<1s			●		●		● *
SlimLane 944SC	60		525-600	900-1700	857 x 1274 (2)		1s			●		●		● *
SlimLane 945SC Twin	2x60		2x525-600		1565 x 1274 (2)		1s			●		●		● *
FirstLane	60		600/900	910	990 x 1300 / 1290 x 1300		<1s			●		●		● ⁽³⁾
SmartLane 900	60		500-600	1000-1900	1200x1200	<1s				●		●		●
SmartLane 901					1200x1600	<1s				●		●		●
SmartLane 902					1200x2000	<1s				●		●		●
SmartLane 910	60		800-900	1000-1900	1800 x 1200	<1s				●		●		●
SmartLane 911					1800x1600	<1s				●		●		●
SmartLane 912					1800x2000	<1s				●		●		●
SmartLane 910 Twin	2x60		2x500-550	1000-1900	1550x1200	<1s				●		●		●
SmartLane 911 Twin					1550 x 1600	<1s				●		●		●
SmartLane 912 Twin					1550x2000	<1s				●		●		●
SWING GATES														
ServiceLane	20		900	1000-1200			4s			●		●		●
SmartLane 935	10			1000-1900	1280 x 1200		4.5s			●			●	●
AccessLane 933	20			900-1200	1000 x 220		4s			●		●		
AccessLane 934				1500-1900	1535 x 220		6s			●		●		
TRIPOD TURNSTILES														
TriLane TL 1	20		550	760	849 x 400				●		●		●	●
TriLane TL 2					745 x 1300			●		●		●		●
FULL-HEIGHT TURNSTILES														
TRS 370	20		640		1540x1370				●		●		●	
TRS 371	20		560	2290	1540x1529				●		●		●	
TRS 372	2x20		2x640		2400x1370				●		●		●	
TRS 373	2x20		2x560	2290	2400x1370				●		●		●	
TRS PMR	20		1050	2296	1400x991			●			●	●		●
Legend: * Option / ⁽¹⁾ varies with access control systems / ⁽²⁾ L = 1450 mm with 1 end-post / L = 1625 mm with 2 end-posts / ⁽³⁾ on power supply														

 Find the SECURITY DOOR for your needs		Passages/ minute ⁽¹⁾	Reduced mobility	Passage width (mm)	Height (mm)		Dimension (mm)		Movement			Activa- tion		Detection			Fail safe opening in case of power failure ⁽²⁾
					Exterior	Interior	Outer	Inner	No. of doors	Swing	Rotating	Sliding	Motorised	Manual	Floor weighing	Suspended weighing	
AUTOMATIC ROUND SECURITY BOOTHS																	
ClearLock 635	6		580	2350	2074	Ø 1052	Ø 832	2			●	●		●			
ClearLock 636			650			Ø 1152	Ø 949				●	●		●			
ClearLock 637	5		900	2350	2074	Ø 1500	Ø 1292	2			●	●		●			●
ClearLock 638	6							4			●	●		●			●
ClearLock 639	5		900	2300	2025	Ø 1750	Ø 1536	2			●	●		●		●	●
ClearLock 639T				2575	2300						●	●		●		●	●
AUTOMATIC SQUARE SECURITY BOOTHS																	
ClearLock 645	6		580	2360	1990	1050x1050	Ø 719	2			●	●			●		
ClearLock 646			640			1150x1150	Ø 861				●	●			●		
AUTOMATIC EXTENDED SECURITY BOOTHS																	
ClearLock 656	6		900	2400	2075	1485x1900	1305x1695	4			●	●		●			●
AUTOMATIC SEMI-CIRCULAR SECURITY BOOTHS																	
ClearLock 660	6		900	2400	2125	1910x1250	1786x1058	4			●	●		●			●
ClearLock 664	1,5 s		812	2400	2045	1252x1000	1119x841	1			●	●		●			
AUTOMATIC SECURITY BOOTHS WITH FLAT DOORS																	
InterLock 673	6		900	2350	2135	1600x1200	1542x820	4			●	●		●			●
InterLock 678						1600x1600	1542x1220				●	●		●			●
InterLock 674	2 x 6		700 + 900	2350	2135	2300x1200	(1016x820)+ (1216x820)	8			●	●		●			●
MANUAL SECURITY BOOTHS WITH FLAT SWING DOORS																	
InterLock 681			700	2300	2034	1050x1050	986x962	2	●				●	●			
InterLock 682			900			1280x1050	1220x962		●				●	●			
InterLock 680			950	2250	2100	1050x400	605x293	2	●				●	●			
AUTOMATIC REVOLVING SECURITY DOORS																	
RevLock 603	2 x 20 ⁽²⁾		1206	2300	2073	Ø 1970	913	4		●		●		●			
RevLock 604			1090			Ø 1810	829			●		●		●			
RevLock 605			1479			Ø 2362	991			●		●		●			
RevLock 614	1 x 15 ⁽²⁾		829	2300	2073	Ø 1810	829	3		●		●		●			
RevLock 603T	2 x 20 ⁽²⁾		1206	2505	2300	Ø 1970	913	4		●		●				●	
RevLock 604T			1090			Ø 1810	829			●		●				●	
RevLock 605T			1479			Ø 2362	991			●		●				●	
SWING SECURITY DOORS																	
DoorLock 693			900-1200	2100-2350	2030-2280	1030-1330	900-1200	1	●				●				antipanic bar
DoorLock 694			920	2205	2115	1090	920	1	●				●				

⁽¹⁾ varies depending on the access control system / ⁽²⁾ Option

⁽¹⁾ varies depending on the access control system / ⁽²⁾ Option

HEADQUARTERS - INTERNATIONAL SALES AUTOMATIC SYSTEMS SA

Avenue Mercator 5 – 1300 Wavre
BELGIUM
T.: +32 (0)10 230 211
sales.asgroup@automatic-systems.com

LOCAL OFFICES IN THE WORLD

FRANCE

T.: +33 (0)1 30 28 95 50 (Persan office)
T.: +33 (0)1 41 11 40 20 (Suresnes office)
Email: sales.fr@automatic-systems.com

SPAIN

T.: +34 (0)93 478 77 55 (Barcelona office)
T.: +34 (0)91 659 07 66 (Madrid office)
Email: sales.es@automatic-systems.com

UNITED KINGDOM

T.: +44 (0)1604 65 42 10
Email: sales.uk@automatic-systems.com

UNITED STATES

T.: +1 516 944 94 98
Email: sales.nam@automatic-systems.com

CANADA

T.: +1 450 659 07 37
Email: sales.nam@automatic-systems.com

GERMANY

T +49 2303 553 4040
Email: sales.de@automatic-systems.com



AUTOMATIC
SYSTEMS

Access controlled...
Future secured

www.automatic-systems.com