

- ⌘ **Motorway**
- ⌘ **Car park**
- ⌘ **Industry-Tertiary**
- ⌘ **Hospital/Clinic**
- ⌘ **Residential/sme-smi**
- ⌘ **Controlled access**
- ⌘ **Traffic Management**
- ⌘ **Bridge/Tunnel**



## The reference for the highway environment

High speed performance  
from **0.6 s in continuous service**

Congestion Control  
**50 vehicles per minute**

Modular up to **4.00 meters**  
Wide range of options and accessories

Simple to install  
Reduced maintenance

**Designer and manufacturer  
of boundary access control equipment**



Designed for highway toll booths, the TollPlus 261 barrier meets numerous requirements in terms of performance, reliability and robustness, adaptability and reduced maintenance. Its lack of obstructions and easy access to the mechanism with the equipment located on the opposite side to the traffic allows maintenance operations to be carried out in complete safety.

## Standard characteristics of the TollPlus 261 SR/AVR rising barrier

- 1 • Variable speed control supplied with 230 Volts single-phase ensures control of the accelerations, decelerations, short circuit protection, grounding, overcurrent and thermal protection of the reduction motor
  - Limitation of the electromagnetic group torque allows immediate stopping of the boom during closing and in case of an obstacle
- 2 • Three-phase reversible reduction motor brake, lubricated for life, ensures the perfect protection of the mechanism in case of malicious forced raising of the boom
- 3 • Auto-aligning flange bearing for main shaft, lubricated for life
- 4 • Main shaft directly driven by reduction motor eliminating all complicated adjustments and the risk of additional breakdown

- Boom made from aluminum alloy with an 80 x 54 mm oval profile with orange reflective stripes cl. 1  
\* **Numerous boom options offered**

- 5 • **Boom swing-off system in case of impact with swing-off sensor**  
• **Automatic opening in case of electrical power supply interruption (via balance spring)**
- 6 • Control logic programmed according to customer specification with adjustable end of movement period

Information provided:

**Boom Up Position**  
**Boom Down Position**  
**Boom swung off**  
**Other information on request**

- 7 • Modular terminal block  
\* **Integration of customer equipment on request**
- 8 • Steel housing thickness 3 mm with anti-corrosion orange finish polyester paint treatment RAL 2000<sup>(1)</sup>
- 9 • Steel base thickness 5 mm anti-corrosion orange finish polyester paint treatment RAL 2000<sup>(1)</sup> and rubber sealing joint on base
- Steel door (opposite side to traffic) thickness 1.5 mm with anti-corrosion orange finish polyester paint treatment RAL 2000<sup>(1)</sup> giving multiple access to the mechanism and equipment.

<sup>(1)</sup>**Other color options available according to RAL colour chart**


- Triangle type security lock


- **Adjustable opening and closing speeds from 0.6 s to 2.5 s in continuous service**

- **High speed performance:** 50 vehicles per minute
- **High degree of robustness:** 20,000 cycles / day
- **MCBF:** 10,000,000 cycles
- **MTTR:** 1 hour (boom: 10 min)
- **Operating temperature:** from - 25° C to + 60° C
- **Average relative humidity:** 95%
- **Protection:** IP55


- **Weight:** 100 kg

- **Barrier supplied fitted, tested and adjusted to customer configuration at factory**
- **Numerous accessories and options available**
- **Simple installation and reduced maintenance**

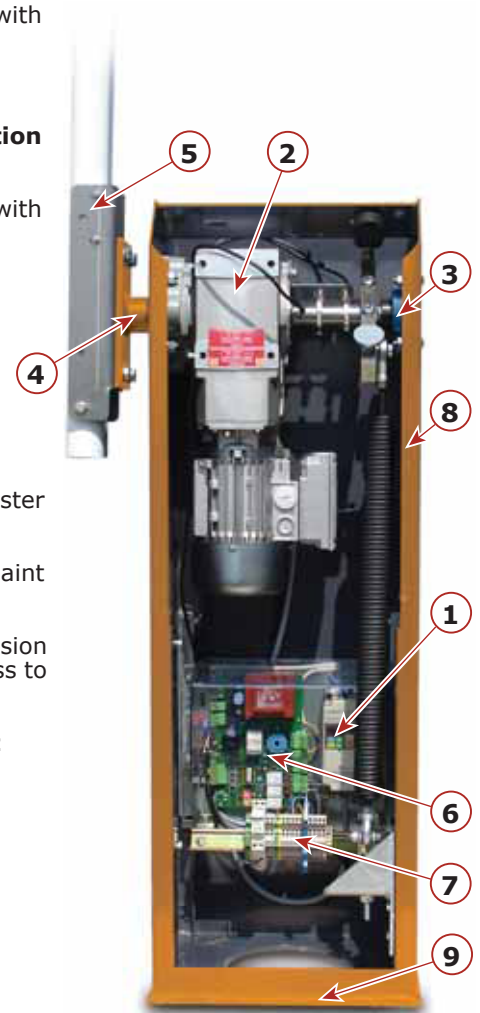


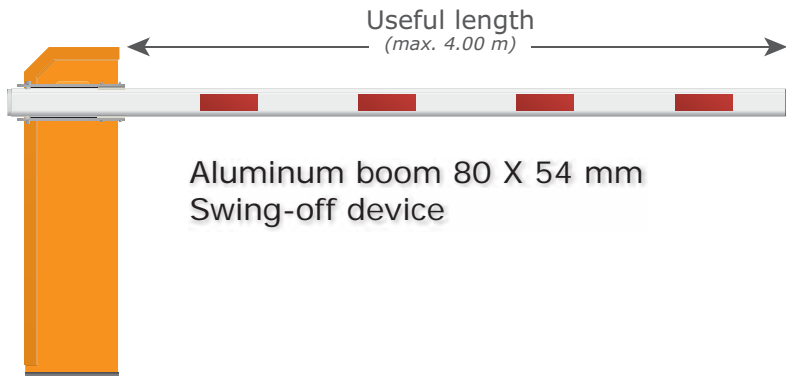


Aluminum boom 80 X 54 mm  
Swing-off device

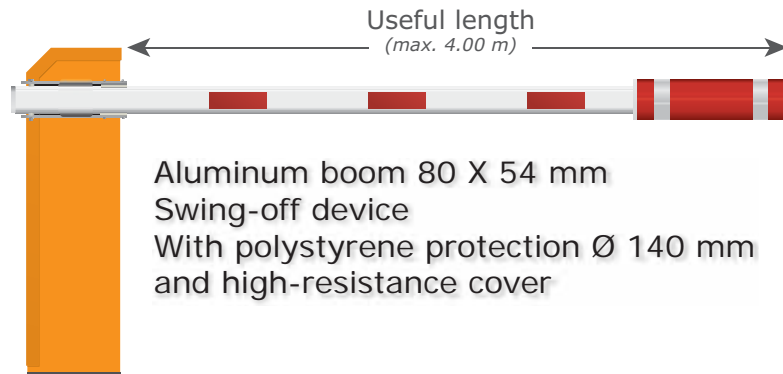

Aluminum boom 80 X 54 mm  
Swing-off device  
With polystyrene protection Ø 140 mm  
and high-resistance cover

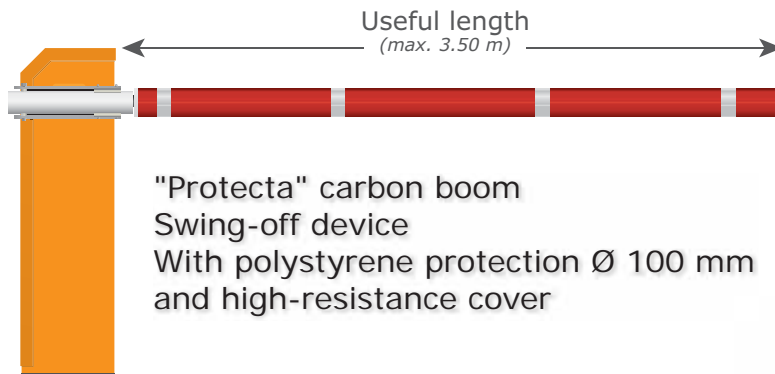

"Protecta" carbon boom  
Swing-off device  
With polystyrene protection Ø 100 mm  
and high-resistance cover

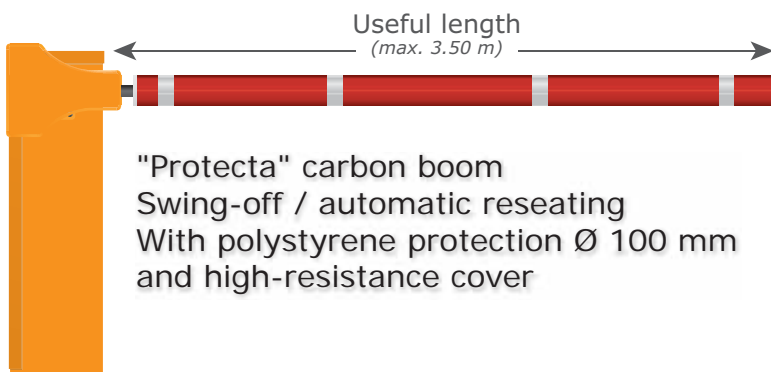

"Protecta" carbon boom  
Swing-off / automatic reseating  
With polystyrene protection Ø 100 mm  
and high-resistance cover

Visual alarm with  
flashing lights




Audible  
siren alarm

LED lights Ø 200 mm




### Barrier installation

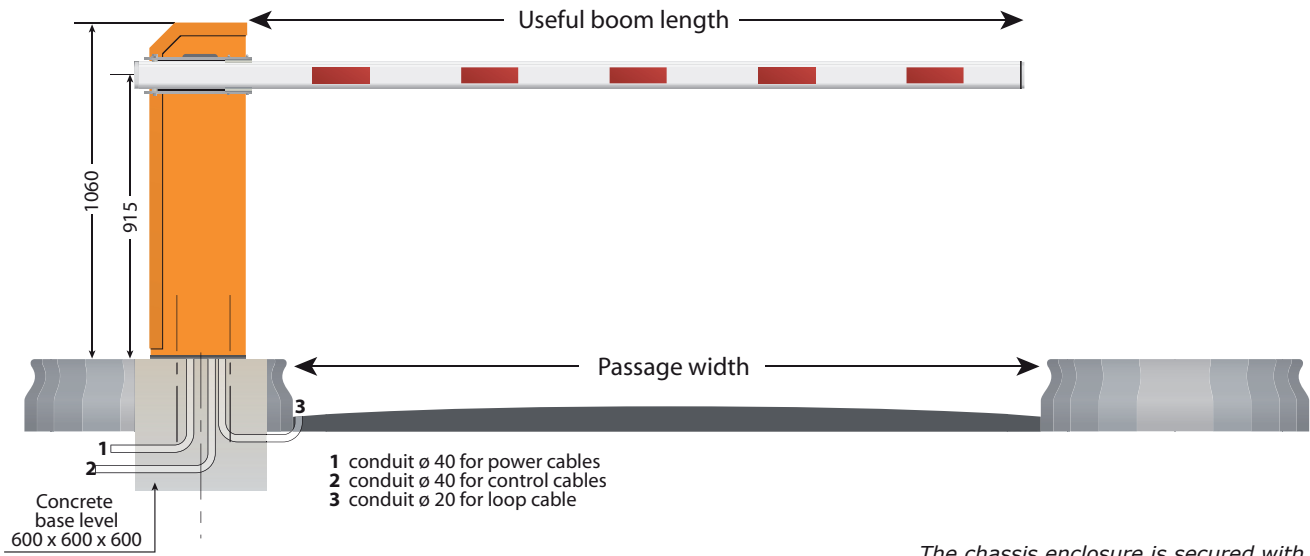


The chassis enclosure is secured with 4 screws and 4 washers. It is possible to fix the barrier with M12 chemical anchors


### Base

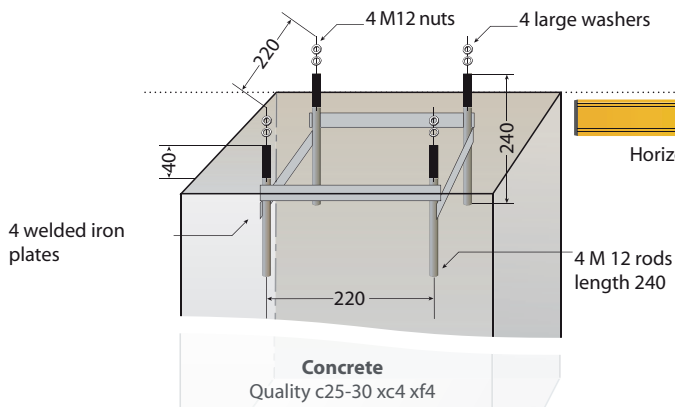

### Housing plate

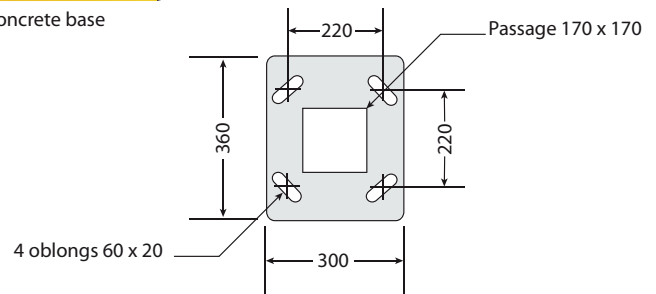

### Direction of boom arm

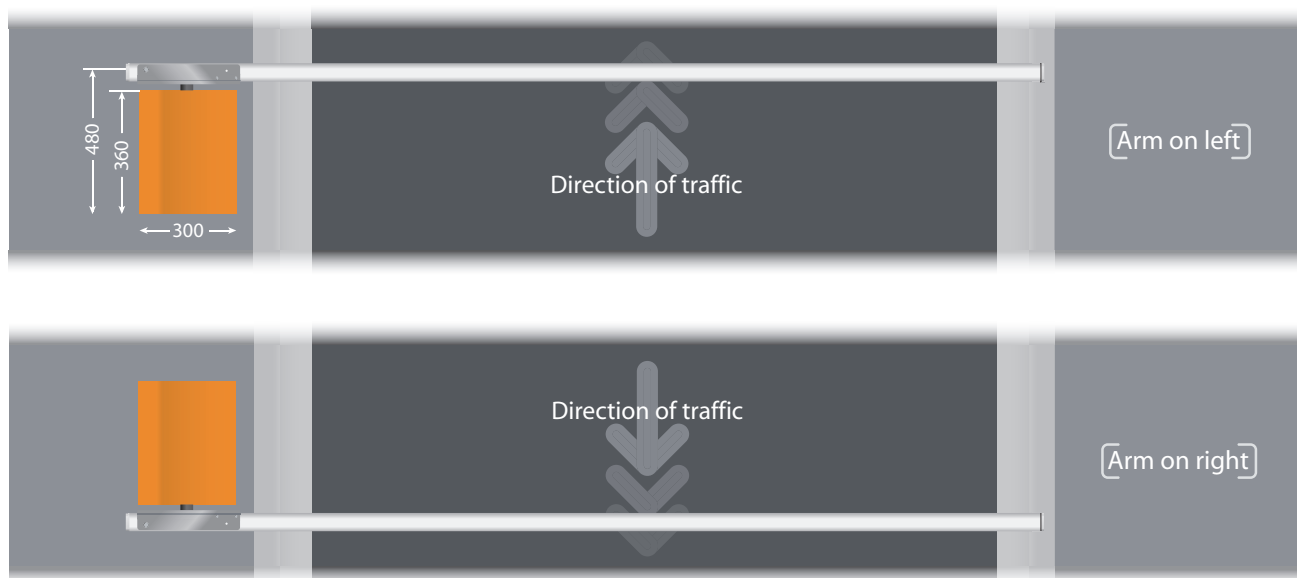

Your installer:

