

Access controlled... Future secured.



# InterLock

SECURITY DOORS

**AS** **AUTOMATIC**  
**SYSTEMS**  
LEVER GROUP

PEDESTRIAN





## AESTHETICS

- Light, modern structure featuring a large, glazed surface
- Doors mounted directly onto existing floor
- Indoor, façade or outdoor installation (under canopy)
- Elegant, thin canopy for integration into virtually any building, while ensuring passage height in excess of 2000 mm
- Wide range of finishes (brushed or mirror stainless steel, various RAL colour paints, obstacles in tinted glass...)

## FLEXIBILITY

- Available options: products disassembled, in accordance with on-site installation requirements
- Combination of various passage widths (InterLock 674)
- Electronic and mechanical parts located in the canopy, easily accessible for maintenance
- Wide range of accessories available

## SECURITY

- Rectangular booths with entry/exit sliding doors (InterLock 673/674)
- Bullet, vandalism and burglary resistant, fully compliant with industry standards (EN 1063, EN 356)
- Several electronic detection systems available
- Outside surveillance
- User safety ensured

## PERFORMANCE

- Automated high-flow pedestrian access control
- Control panel for set up and control
- Energy savings
- Remote management using TCP/IP connectivity





# THE INTERLOCK 67X SERIES

## SQUARE SECURITY BOOTHS

Single or double rectangular booths equipped with fast sliding doors (InterLock 673/674), ensuring a high level of access control. They are particularly suited to public sites.



### InterLock 673

Simple passage  
 Passage width: 900 mm  
 Footprint (L x W): 1600 x 1200 mm



### InterLock 674

Double passage  
 Passage width: 700 / 900 mm  
 Footprint (L x W): 2300 x 1200 mm




### InterLock 675

Simple passage  
 Passage width: 950 mm  
 Footprint (L x W): 1050 x 400 mm



## SPECIFICATION

	Footprint (L x W x H) (mm)	Obstacle height (mm)	Passage width (mm)	Passages/minute	Disabled access	Obstacles	Movement	Application		Aesthetics		MCBF (**)
								Indoor	Outdoor	Contemporary	Classic	
<b>IL 673</b>	1600 x 1200 x 2350	2135	900	6	•	2	Retractable (1,5s)	•	•(*)	•		1 million/2 years
<b>IL 674</b>	2300 x 1200 x 2350	2135	700+900	2x6	•	2*2	Retractable (1,5s)	•		•		1 million/2 years
<b>IL 675</b>	1050 x 400 x 2250	2100	950	6		2	Swing	•	•(*)	•		1 million/2 years

(\*) Under canopy / (\*\*) MCBF = Mean cycles between failure

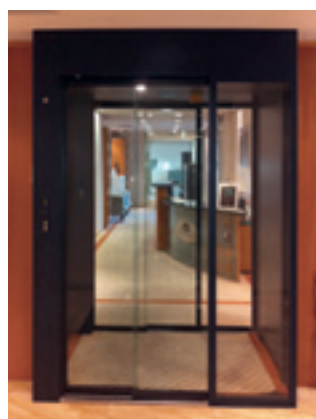

## OPTIONS & ACCESSORIES

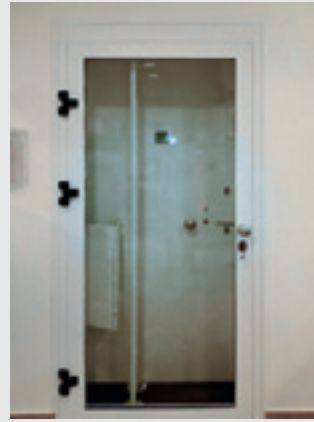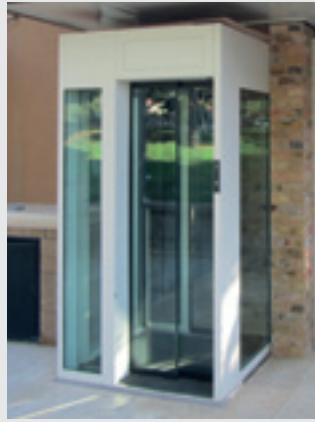

- Entry and/or exit opening sensor
- Entry metal detector device
- Left object detection (with entry metal detector device)
- Housing available in a number of RAL paint finishes
- Housing 304L stainless steel (brushed or mirror polish)
- Internal column for readers and accessories
- Adaptation for UL power supply 230/110 V AC
- Tinted glass finish
- Special frame for built-in installation
- Converter RS485-LAN for networking capability
- Dismountable booth



## BENEFITS

- Automated pedestrian access control
- Secures access to restricted areas
- Employee and visitor entry/exit management
- Access control management at public sites
- Reduces the need for security personnel
- Energy savings

## APPLICATIONS

- Office buildings
- Headquarters
- Administrative sites
- Government buildings
- Airports
- Sensitive sites : industrial sites, data centres, banks