









# One model... Endless possibilities

The BL 229 rising barrier is a universal barrier: its high performance and great reliability enable it to be used in a wide range of applications: traffic management, parking areas, industrial sites... and even toll roads.



Maximum free passage 10' (3 m)

## **▲ SECURITY & SAFETY**

- Rapid closure after each vehicle passage
- Mechanical locking in open or closed position
- ETL certified according to UL325 standards
- Safety edge that raises the arm if obstacles are detected during closing
- Unlocking is possible in case of power failure

# ▲ AESTHETICS & CUSTOMIZATION

- Articulated arm
- Personalized color (option)
- · Heating (option)



- Designed for many applications and environments
- Numerous accessories offered
- Modifications to configuration possible after installation of the product
- Equipped with a configurable AS1620 control board
- Able to operate in temperatures down to -50° (with optional heater)



#### BL-229 Articulated

Maximum free passage 19'-7" (6 m)

# RELIABILITY & PERFORMANCE

- Quick and quiet movement (from 0.6 sec)
- Designed for intensive use
- Programmable speed
- The result of over 50 years of experience
- Sturdy housing designed to protect the components
- · Long life cycle



# ▲ OPTIONS

#### CONTROL

- Photocell
- Laser





#### ARM LIGHTING

- Bright, long lasting LED panels
- Ideal for enhanced safety and security at night



## TIP SUPPORTS

- To support barrier arms
- To reinforce the security level



## **PROTECTION**


• Rotating base

## SAFETY EDGE



#### **PEDESTAL**

- Post for integration of accessories
- Car, truck or dual height
- Ideal for rising barriers



### COMMAND

• Remote control






## DETECTION

• Loop detector



#### TRAFFIC LIGHTS



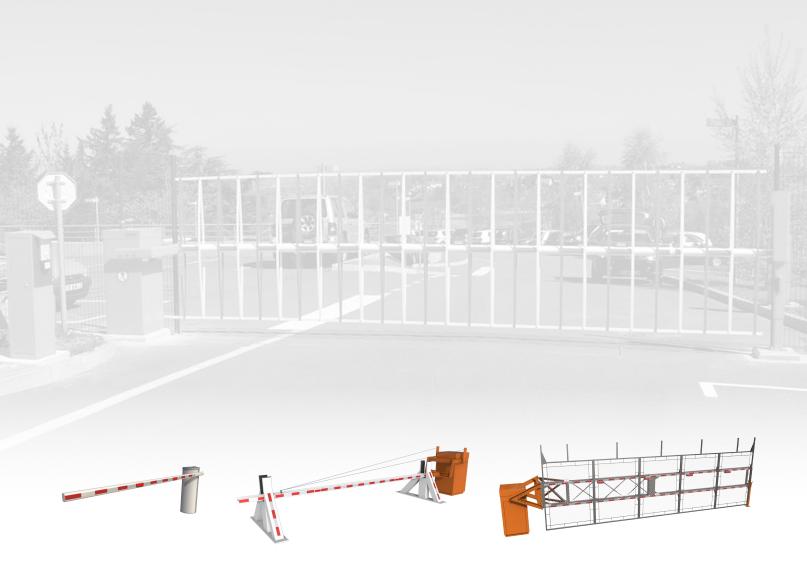

# ▲ ADDITIONAL VEHICLE PRODUCTS AVAILABLE







Access controlled...
Future secured